



## VOLTGUARD

Over and under voltage protection

### Description

The VoltGuard is a plug-in adaptor that prevents damage to equipment from high and low voltage levels of any duration. It works by disconnecting power when voltage levels exceed set parameters. Reconnection takes place when power returns inside parameters for a pre-set period. Fully automatic in operation.

The VoltGuard provides power-back surge protection as standard by its in-built start-up delay and voltage monitoring. Additionally, the VoltGuard includes surge and spike protection.

### Function

Protects against **high voltage**, and power-back surges. These conditions are harmful to electrical and electronic equipment. By disconnecting the power when it is bad, the VoltGuard safeguards against short term and long term damage to ensure higher efficiency from your appliances.

Also protects against **low voltage**, brown-outs and voltage dips. These conditions are harmful to fridges, freezers, pumps and all motor equipment.

Re-connects after a delay, depending on the dial setting of 30 Sec (RED area) or 3 Min (BLUE area), thereby ensuring stability of the power supply.

### Applications


Ideal for protection of all sensitive electronic and electrical equipment such as TV, video, Hi-Fi, fax, PABX etc. Also ideal for protection of fridges, freezers, coolers and all refrigeration equipment.

### Tips

Covers all domestic appliances, as it has over and under protection.



### Features



### Protects against



### Protection for



## iSense™ function

The iSense™ technology allows you to control how sensitive the VOLTGUARD is to voltage problems. Using the iSense™ dial you can set the desired level of protection and startup delay.

### Dial settings

There are four settings available:

#### 1. Blue / H

3 minute startup delay at High setting. Ensures greater protection by narrowing the acceptable voltage limits. This is ideal for users with less erratic mains supply that require better protection. This is ideal for compressor based loads for example: fridges, coolers etc.



#### 2. Blue / L

3 minute startup delay at Low setting. Ensures more working time as it will tolerate wider acceptable voltage limits. This is ideal for users with more erratic mains supply that constantly switches off, providing a wider window of acceptable voltage limits. This is ideal for compressor based loads for example: fridges, coolers etc.



#### 3. Red / H

30 second startup delay at High setting. Ensures greater protection by narrowing the acceptable voltage limits. This is ideal for users with less erratic mains supply that require better protection. This is ideal for electronic equipment such as PC, TV, Satellite etc.



#### 4. Red / L

30 second startup delay at Low setting. Ensures more working time as it will tolerate wider acceptable voltage limits. This is ideal for users with more erratic mains supply that constantly switches off, providing a wider window of acceptable voltage limits. This is ideal for electronic equipment such as PC, TV, Satellite etc.




## TIMESAVE™ function

TIMESAVE™ adds the following protective function:

The Voltguard has a built-in microprocessor which adds the advanced feature TimeSave.™ TimeSave™ means that when the mains return to normal, the unit checks the duration of the OFF time. If the unit has been off for more than the standard wait time, then it will reconnect the mains within 10 seconds. This means the Sollatek unit will give you more vital working time than any other switcher.

### Dimensions

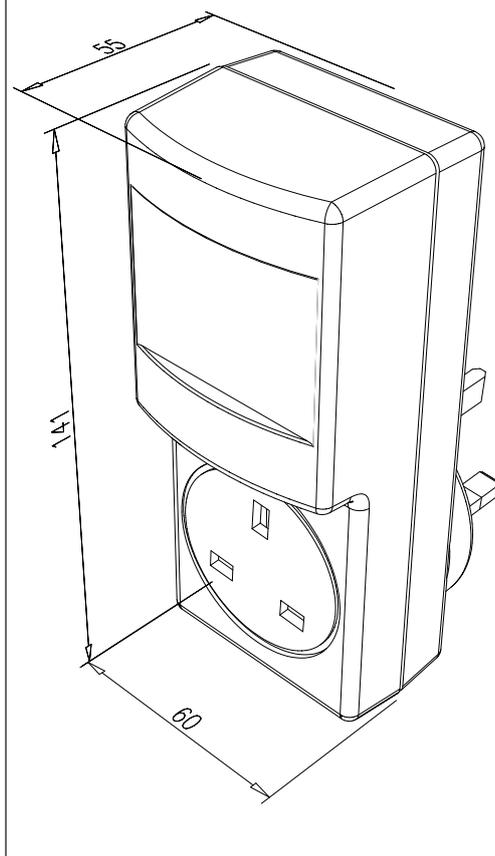

### Specifications

Model	VoltGuard	
Nominal voltage	115V	
Current rating	10A	
Inrush current	128A	
Mains surge/spike response time	<10ns	
Mains max spike/surge Discharge	6.5kA >3kA (8/20µs surges)	
Spike protection	160J	
Mains disconnect response time	Over-voltage	>20ms
	Under-voltage	0.5 Sec
Maximum settable wait time	(iSense Blue side)	3 min
Minimum settable wait time	(iSense Red side)	30 sec
TimeSave™ delay	10 sec	
Over voltage disconnect	iSense Low	133V
Over voltage disconnect	iSense High	128V
Under voltage disconnect	iSense Low	90V
Under voltage disconnect	iSense High	95V
IP rating	IP20	
Dimensions (mm)	Unpacked	140 x 60 x 90
	Packed	250 x 130 x 95
Packing details	Carton qty	24
	Pallet qty	1008
Weight (gm)	190	
Data line protection	No	
Socket availability	US	

ITEM	PRODUCT CODE	
VOLTGUARD – US SOCKET	115V	92625500
For more information on the Sollatek's Voltage Protection Range refer to the <b>Voltage protection catalogue</b> or visit <a href="http://www.sollatek.com">www.sollatek.com</a>		

# Sollatek™

**Sollatek (UK) Ltd.**

Unit 9/10, Newlands Drive, Poyle 14 Industrial Estate, Colnbrook, Slough, Berkshire SL3 0DX, UK

Tel: +44 (0)1753 688300 Fax: +44 (0)1753 685306

Technical support: [support@sollatek.com](mailto:support@sollatek.com)

Sales: [sales@sollatek.com](mailto:sales@sollatek.com) [www.sollatek.com](http://www.sollatek.com)